



**HEATING CATALOGUE**  
Home Appliance Products

# ABOUT US

**SICO Global Limited** is a well-established company located at Hong Kong and face to worldwide.

We have many years' experience in fans, heaters and household appliances. With the strong backup from the team, we own our good sourcing, engineers, quality control, artwork design and so on. Ensure will provide satisfaction and good services to customers.

Meanwhile, in the future company's development planning, we will dedicate to develop our own design products and unique items to achieve markets necessity.

**SICO** – is your **Sincere Partner!** We await you to develop mutual business and benefit!



[www.sico-hk.com](http://www.sico-hk.com)

A collage of four images arranged in a 2x2 grid, each featuring a different type of heating appliance. The top-left image shows a white PTC heater and a black fan heater. The top-right image shows a black convector heater. The bottom-left image shows a white radiant heater. The bottom-right image shows a row of white oil heaters. To the left of each image is a large, white, stylized number (01, 02, 03, 04) and to the right is the product name in a white, sans-serif font.

- 01  
PTC heater & Fan heater
- 02  
Convector heater
- 03  
Radiant heater
- 04  
Oil heater

**Sico** for winter



## >>>> PTC HEATER

### Mod. PH 28RC PTC Heater

- PTC ceramic heating element
- Adjustable thermostat
- 2 heat setting 900/1000W + cold fan function
- Safety overheat protection
- Power indicator light
- Integrated carry handle
- With remote control
- Touch control on the top panel
- Temperature sensor
- With 8 hours timer control



Power supply	220-240V~ 50Hz/60Hz
N.W(Kg)	2.3
Unit size(mm)	203x203x240
Giftbox size (mm)	232x244x568
1 x 20GP	800 pcs
1 x 40GP	1700 pcs
1 x 40HQ	2020 pcs

1800 W

2 LEVEL

VENTILATION

OSCILLATION

OSCILLATION

OSCILLATION



## >>>> PTC HEATER

### Mod. SAFFI PTC ceramic tower heater

- PTC ceramic heating element
- High thermal efficiency
- 2 heat setting 800W/1800W + cold fan function
- Safety overheat protection
- Oscillation function
- Adjustable thermostat
- Safety tip over switch
- With 24 hours timer control
- LED display
- Temperature adjustment
- Touch control panel



Power supply	220-240V~ 50Hz
N.W(Kg)	2.8
Unit size(mm)	165x147x240
Giftbox size (mm)	180x160x255
1 x 20GP	3240 pcs
1 x 40GP	6840 pcs
1 x 40HQ	7380 pcs

1800 W

2 LEVEL

VENTILATION

OSCILLATION

OSCILLATION

OSCILLATION

### Mod. CONY PTC heater

- PTC ceramic heating element
- 2 heat setting 1000/2000W + cold fan function
- Safety overheat protection
- With 80° Oscillation
- Integrated carry handle
- With Safety Tip Over Switch
- Adjustable thermostat
- With LCD display
- 24 hours electronic timer setting
- Touch control panel
- Temperature control adjustable 5°C~38°C



2000 W

2 LEVEL

VENTILATION

OSCILLATION

OSCILLATION

OSCILLATION

Power supply	220-240V~ 50Hz
N.W(Kg)	1.6
Unit size(mm)	300x200x160
Giftbox size (mm)	315x215x175
1 x 20GP	1782 pcs
1 x 40GP	3564 pcs
1 x 40HQ	3888 pcs

## >>>> PTC HEATER

### Mod. PH 26 & PH 26 RC

#### PTC heater

- PTC ceramic heating element
- 2 heat setting 900/1500W + cold fan function
- Safety overheat protection
- Auto left/right oscillation
- Mechanical tilt head up & down
- Adjustable thermostat
- With Safety Tip Over Switch

#### PH 26 RC

- With Remote Control
- 7 hours timer setting
- Touch control panel



1500 W

2 LEVEL heat setting

VENTILATION

OSCILLATION

SWITCH

TIME

TILT

### Mod. PH 27 PTC Heater

- PTC ceramic heating element
- 1 heat setting 600W + cold fan function
- Safety overheat protection
- Touching bottom for control the shake on the top
- Safety tip over switch
- Color : Pink or Black

VENTILATION

OSCILLATION

SWITCH

TIME

TILT



Power supply	220-240V~ 50Hz
N.W(Kg)	1.8
Unit size(mm)	240x205x300
Giftbox size (mm)	260x225x320
1 x 20GP	2448 pcs
1 x 40GP	5140pcs
1 x 40HQ	6168 pcs

Power supply	220-240V~ 50Hz/60Hz
N.W(Kg)	0.9
Unit size(mm)	116x116x212
Giftbox size (mm)	153x153x243
1 x 20GP	4680 pcs
1 x 40GP	9728 pcs
1 x 40HQ	10976 pcs

## >>>> PTC HEATER

### Mod. BALLY PTC Heater

- PTC ceramic heating element
- Adjustable thermostat
- 2 heat setting 900/1500W + cold fan function
- Safety overheat protection
- Power indicator light
- Integrated carry handle
- Color : Any injection color

VENTILATION

OSCILLATION

THERMOSTAT

TILT



### Mod. CUBE A & CUBE B & CUBE C PTC heater

- PTC ceramic heating element
  - 2 heat setting 750W/1500W
  - Safety overheat protection
  - Safety tip over switch
- CUBE C**
- 2 heat setting 700W/1400W
  - Power indicator light

VENTILATION

OSCILLATION

THERMOSTAT

TILT



CUBE A



CUBE B



CUBE C

1500 W

2 LEVEL heat setting

VENTILATION

OSCILLATION

THERMOSTAT

TILT

Model No.	CUBE A	CUBE B	CUBE C
Power supply	220-240V~ 50-60Hz	220-240V~ 50-60Hz	220-240V~ 50-60Hz
N.W(Kg)	1.0	1.2	1.8
Unit size(mm)	180x100x240	180x100x250	208x120x253
Giftbox size(mm)	185x105x245	185x105x255	210x120x258
1 x 20GP	5832 pcs	5184 pcs	3624 pcs
1 x 40HQ	13860 pcs	12312 pcs	7650 pcs

## >>>> PTC HEATER

### Mod. FAST PTC Heater

- PTC ceramic heating element
- 2 heat setting 750/1500W + cold fan function
- Safety overheat protection
- With Oscillation
- Tilt head up & down
- Safety tip over switch
- Color : White or Black



Power supply	220-240V~ 50Hz
N.W(Kg)	1.48
Unit size(mm)	200x205x290
Giftbox size (mm)	240x235x350
1 x 20GP	
1 x 40GP	
1 x 40HQ	

1500 W



### Mod. BINNO & BINNO D PTC heater (unique round shape design)

- PTC ceramic heating element
- 2 heat setting 600/1200W + cold fan function
- Safety overheat protection
- Power indicator light
- Integrated carry handle
- Concealed base design oscillation function
- Adjustable thermostat

#### BINNO D

- Digital control
- 9 hours timer setting
- Touch control panel
- Ambient temperature display



1200 W



## >>>> PTC HEATER

### Mod. PH 20 & PH 20RCD PTC ceramic tower heater

- PTC ceramic heating element
- High thermal efficiency
- 2 heat setting 1200W/2000W + cold fan function
- Safety overheat protection
- Oscillation function
- Adjustable thermostat
- Safety tip over switch

#### PH 20RCD

- With 1-8 hours timer control
- LED display
- With remote control



2000 W



### Mod. SLIM & SLIM RC PTC ceramic tower heater

- PTC ceramic heating element
- Safety overheat protection
- Power indicator light
- Oscillation function
- Integrated carry handle
- Safety tip over switch
- Adjustable thermostat
- Color : White or Black

#### SLIM

- 2 heat setting 1200W/2000W + cold fan function
- Mechanical knob control

#### SLIM RC

- 2 heat setting 1200W/2000W
- With 7.5 hours timer setting
- LED display
- With remote control



2000 W



## >>>> PTC HEATER

### Mod. MERCY-LN RC & MERCY-L RC

#### Bladeless PTC heater

- 220-240V~ 50Hz
- New generation of PTC heating element
- Safety and energy saving
- 2 heating setting 1000W /2000W
- Safety overheat protection
- Auto tip-over switch protection
- 60 degree automatic rotation, wide heating range
- With 7.5 hours timer
- With remote control
- With ambient light



Power supply	220-240V~ 50Hz 2000W
N.W(Kg)	3.0
Unit size(mm)	292x171x570
Giftbox size (mm)	320x230x620
1 x 20GP	600 pcs
1 x 40GP	1200 pcs
1 x 40HQ	1450 pcs

## >>>> PTC HEATER

### Mod. MERCY-N RC & MERCY RC

#### Bladeless PTC heater

- 220-240V~ 50Hz
- New generation of PTC heating element
- Safety and energy saving
- 2 heating setting 1000W /2000W
- Safety overheat protection
- Auto tip-over switch protection
- 60 degree automatic rotation, wide heating range
- With 7.5 hours timer
- With remote control



Power supply	220-240V~ 50Hz 2000W
N.W(Kg)	30.
Unit size(mm)	292x171x570
Giftbox size (mm)	320x230x620
1 x 20GP	600 pcs
1 x 40GP	1200 pcs
1 x 40HQ	1450 pcs



>>>> PTC HEATER



Mod. PH 03  
PTC heater

- 220-240V~ 50Hz
- 360° PTC ceramic heating element
- 2 heat setting 750W/1500W
- Safety overheat protection
- Auto tip-over switch protection
- Adjustable thermostat

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
210x195x290	1.6/1.9	2120	4720	5000



Mod. PH 03 RC  
PTC heater

- 220-240V~ 50Hz
- 360° PTC ceramic heating element
- 2 heat setting 750W/1500W
- Safety overheat protection
- Auto tip-over switch protection
- Adjustable thermostat
- 12 hours timer
- With remote control
- LED display

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
210x195x290	1.6/1.9	2120	4720	5000



>>>> PTC HEATER

Mod. SQUARE  
PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
128x160x423	2.0/2.4	1400	2800	3400



Mod. SQUARE RC  
PTC heater with remote control

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heating setting 1000W /2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- With 8 hours timer
- With remote control
- LED display with room temperature

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
128x160x423	2.0/2.4	1400	2800	3400




Mod. PH 11RC  
PTC heater with remote control



- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W + cold fan function
- Safety overheat protection
- Oscillation function
- With remote control
- Safety tip over switch
- Adjustable thermostat
- With 24 hours timer setting
- LED display
- With handle


Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
170x126x415	2.1/2.8	1632	3360	3920

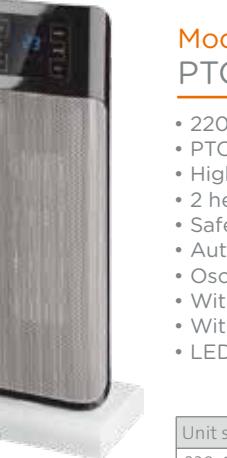

Mod. PH 12RC  
PTC heater with remote control

- 220-240V~ 50Hz
- PTC ceramic heating element
- High thermal efficiency
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- With timer
- With remote control
- LED display with room temperature

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
230x180x600	2.3/3.1	-	-	2550



Mod. STONE RC  
PTC heater with remote control

- 220-240V~ 50Hz
- New generation of PTC heating element
- Safety and energy saving
- 2 heating setting 1000W /2000W
- Safety overheat protection
- Safety overheat protection
- Auto tip-over switch protection
- 50 degree automatic rotation, wide heating range
- With 8 hours timer
- With remote control
- LED display
- Automatic constant temperature control

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
245x245x650	2.4/3.2	520	1040	1280



Mod. KALOS RC  
PTC heater with remote control

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heating setting 1100W /2200W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- Adjustable thermostat
- With 8 hours timer
- With remote control
- LED display with room temperature

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
250x250x810	4.2/5.2	-	1200	1350



## >>>> PTC HEATER



### Mod. HANDY

Plugin PTC heater with digital control

- 220-240V~ 50/60Hz
- One heat setting 400W
- Power switch with indicator light
- With LED display
- 12 hours programmable timer
- Digital thermostat from 15-35°C
- Over heat protection
- Rotatable plug
- Tip over switch optional

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
112x83x180	0.49/0.56	11280	23352	27720



### Mod. TETO

PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 750/1500W
- Safety overheat protection
- Integrated carry handle
- Safety tip over switch

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
145x105x230	0.9/1.2	6240	11640	13400



## >>>> PTC HEATER



### Mod. BARVO

PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 900W/1500W + cold fan function
- Safety overheat protection
- Auto tip-over switch protection
- Power indicator light
- Integrated carry handle
- Adjustable thermostat control

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
198x153x266	1.26/1.57	3150	6390	7500



### Mod. BARVO OSC

PTC heater with remote control

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 900W/1500W + cold fan function
- Safety overheat protection
- Auto tip-over switch protection
- Power indicator light
- Oscillation function
- Integrated carry handle
- Adjustable thermostat control

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
245x175x335	1.48/1.78	2982	6060	7110



## >>>> PTC HEATER



### Mod. PH 02

PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 750W/1500W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Power indicator light
- Auto tip-over switch protection

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
215x135x267	1.15/1.3	3012	6600	7764



### Mod. PH 02OS

PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 750W/1500W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Power indicator light
- Auto tip-over switch protection
- Oscillation function

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
215x150x295	1.4/1.7	2250	5040	5940



### Mod. PENGUIN M

PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- With osocilation function
- Manual control
- Power indicator light
- Auotmatic wind flow function
- Low noise motor
- Overheat protection and de-energization

Giftbox size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
230x250x505	1.85/2.1	900	1900	2300




### Mod. PENGUIN

PTC heater with digital control

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W + cold fan function
- With osocilation function
- With safe tip over switch
- With digital touch control panel
- Auotmatic wind flow function
- 0-9 hour timer
- Low noise motor
- LCD display with room temperature
- Overheat protection and de-energization

Giftbox size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
230x250x505	1.8/2.0	900	1900	2300



## >>>> PTC HEATER

IP21

### Mod. PH 10MS PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- High thermal efficiency
- 2 heat setting 750W/1500W
- Power indicator light
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- Adjustable thermostat control



Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
170x126x260	1.36/1.76	2496	5326	6216



IP21

### Mod. PH 10M PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- High thermal efficiency
- 2 heat setting 1000W/2000W
- Power indicator light
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- Adjustable thermostat control



Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
170x126x415	2.1/2.5	1632	3360	3920



IP21

### Mod. PH 07 PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- With handle



Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
210x210x660	2.4/3.2	-	-	1335



IP21

### Mod. PH 07RC PTC heater with remote control

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- 8 hours timer
- With remote control
- LED display with room temperature
- With handle




Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
210x210x660	2.4/3.2	-	-	1335



### Mod. PH 05 PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- High thermal efficiency
- 2 heat setting 750W/1500W
- Power indicator light
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- Adjustable thermostat control



Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
180x131x272	1.4/1.6	2496	5326	6216



### Mod. PH 06 PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- With handle
- Adjustable thermostat control



Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
210x170x435	2.1/2.5	-	-	4250



### Mod. PH 08 PTC heater

- 220-240V~ 50/60Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function



Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
200x200x560	2.0/2.4	-	-	2800



### Mod. PH 08RC PTC heater with remote control

- 220-240V~ 50/60Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- With timer
- With remote control
- LED display with room temperature



Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
200x200x560	2.0/2.4	-	-	2800




>>>> PTC HEATER



Mod. PH 09  
PTC heater

- 220-240V~ 50/60Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
215x215x600	2.6/3.4	-	-	1440

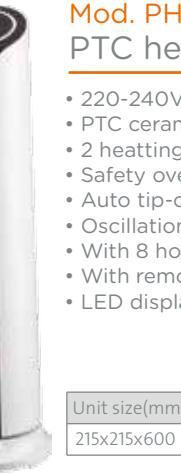

Mod. PH 09RC  
PTC heater with remote control

- 220-240V~ 50/60Hz
- PTC ceramic heating element
- 2 heating setting 1000W /2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- With 8 hours timer
- With remote control
- LED display with room temperature

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
215x215x600	2.6/3.4	-	-	1440



Mod. PH 15  
PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- With handle
- Adjustable thermostat control

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
235x185x610	2.1/2.5	-	-	2550



Mod. PH 15 RC  
PTC heater with remote control

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- With handle
- 8 hours timer
- Remote control
- LED display room temperature


Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
235x185x610	2.1/2.5	-	-	2550



Mod. PH 13  
PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1000W/2000W
- Safety thermal cut-out
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
175x175x490	1.89/2.3	-	-	2520

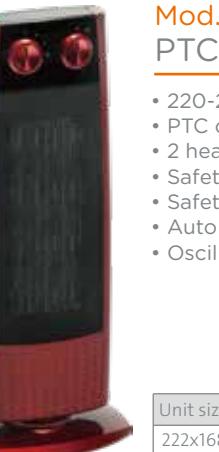

Mod. PH 17  
PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 750W/1500W
- Safety thermal cut-out
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
222x168x515	2.1/2.5	1170	2424	2658



Mod. COLUMN  
PTC heater

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1200W/2000W + cold fan function
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- Adjustable thermostat control

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
280x280x520	2.85/3.2	-	2340	2646



Mod. COLUMN RC  
PTC heater with remote control

- 220-240V~ 50Hz
- PTC ceramic heating element
- 2 heat setting 1200W/2000W + cold fan function
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function
- 8 hours timer
- Remote control
- LED display room temperature
- Adjustable thermostat control

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
280x280x520	2.85/3.2	-	2340	2646



>>>> PTC HEATER



IP2

**Mod. PHW 01**

**PTC heater for wall mounting**

- 220-240V~ 50-60Hz
- PTC heating, high thermal efficiency
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Wall mounted
- Manual and remote control available
- With Indicator light
- 7.5 hours timer
- IPX2

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
450x115x186	1.92/2.71	2150	4200	5040



**Mod. PHW 02**

**PTC heater for wall mounting**

- 220-240V~ 50Hz
- PTC heating, high thermal efficiency
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Wall mounted
- Manual and remote control available
- With Indicator light
- 7.5 hours timer
- LED display

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
520x122x220	2.3/2.6	1288	2304	2640



**Mod. PHW 03**

**PTC heater for wall mounting**

- 220-240V~ 50Hz
- PTC heating, high thermal efficiency
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Wall mounted
- With remote control
- With Indicator light
- 8 hours timer
- With automatic oscillating louvres
- LED display

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
520x132x195	2.9/3.3	1352	2832	3220



>>>> PTC HEATER



IP2

**Mod. PHW 04**

**PTC heater for wall mounting**

- 220-240V~ 50Hz
- PTC heating, high thermal efficiency
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Wall mounted
- With remote control
- With Indicator light
- 8 hours timer
- With automatic oscillating louvres
- LED display
- IPX2

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
614x172x248	3.5/4.1	672	1408	1696




**Mod. PHW 05**

**PTC heater for wall mounting**

- 220-240V~ 50Hz
- PTC heating, high thermal efficiency
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Wall mounted
- With remote control
- With Indicator light
- 8 hours timer
- With automatic oscillating louvres
- LED display
- IPX2

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
590x140x225	2.34/2.64	1296	2736	3384



**Mod. PHW 06**

**PTC heater for wall mounting**

- 220-240V~ 50Hz
- PTC heating, high thermal efficiency
- 2 heat setting 1000W/2000W
- Safety overheat protection
- Wall mounted
- With remote control
- With Indicator light
- 8 hours timer
- With automatic oscillating louvres
- LED display
- Anion for selection

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
620x142x208	4.7/5.35	-	1952	2236



## >>>> FAN HEATER



**Mod. FH 01**  
Fan heater

- 220-240V~ 50Hz
- 2 heat setting 1000W/2000W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Indicator light
- Safety thermal cut-out



Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
215x130x260	0.8/1.1	3300	6600	7980



**Mod. FH 02**  
Fan heater

- 220-240V~ 50Hz
- 2 heat setting 1000W/2000W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Indicator light
- Safety thermal cut-out

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
230x130x265	1.0/1.2	3000	6000	7400



## >>>> FAN HEATER



**Mod. FH 10 OSC**  
Fan heater with timer

- 220-240V~ 50Hz
- 2 heat setting 1000W/2000W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Indicator light
- 24 hours timer setting
- With oscillation

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
250x205x340	1.6/2.2	-	2880	3400



**Mod. FH 11 OSC**  
Fan heater

- 220-240V~ 50Hz
- 2 heat setting 1000W/2000W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Indicator light
- Tip over switch
- With oscillation

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
220*175*300	1.4/1.7	-	4410	5040



**Mod. FH 05**  
Fan heater

- 220-240V~ 50Hz
- 2 heat setting 1000W/2000W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Indicator light
- Safety thermal cut-out



**Mod. FH 09**  
Fan heater

- 220-240V~ 50/60Hz
- 2 speed choices:1200W/2000W+ cold fan function
- Low noise motor
- Adjustable thermostat control
- Long span-line Equally heating
- Automatic tip-over protect
- Safety overheat protection
- Indicator light

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
250x125x245	1.5/1.8	1300	2600	3200



**Mod. FH 12 OSC**  
Fan heater

- 220-240V~ 50Hz
- 2 heat setting 1000W/2000W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Indicator light
- Tip over switch
- With oscillation

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
220x230x 330	1.7/2.3	-	2928	3456



**Mod. FH 13 OSC**  
Fan heater

- 220-240V~ 50Hz
- 2 heat setting 1000W/2000W + cold fan function
- Safety overheat protection
- Adjustable thermostat
- Indicator light
- Tip over switch
- With oscillation

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
245x175x335	1.89/2.3	1590	3240	3810



## >>>> ALUMINUM HEATER

### Mod. BARON A

#### Aluminum tower heater

- Aluminum heating element
- High thermal efficiency
- 2 heat setting 1500W/2500W
- Safety overheat protection
- With handle on the top of product
- Adjustable thermostat
- Safety tip over switch
- 9 hours timer setting
- Ambient temperature display
- With remote control
- Outlet at the top



2500 W

2  
LEVEL  
heating

THERMOSTAT

OSCILLATION

REMOTE  
CONTROLLER

POWER

TIPOVER



Power supply	220-240V~ 50Hz
N.W(Kg)	2.8
Unit size(mm)	340x340x687
Giftbox size (mm)	
1 x 20GP	
1 x 40GP	
1 x 40HQ	

## >>>> ALUMINUM HEATER

### Mod. BARON B

#### Aluminum PTC tower heater

- PTC heating element
- 2 heat setting 550W/2000W
- Safety overheat protection
- Adjustable thermostat
- Safety tip over switch
- 9 hours timer setting
- Ambient temperature display
- With remote control
- Outlet at the top



2000 W

2  
LEVEL  
heating

THERMOSTAT

OSCILLATION

REMOTE  
CONTROLLER

POWER


TIPOVER



## >>>> CONVECTOR HEATER

### Mod. SELECROC Convector heater

- 3 heat setting 700W/1400W/2200W
- Safety overheat protection
- Auto tip-over switch protection
- Adopt a new generation of high-efficiency heating agent, which will be hot upon startup
- With carry handle



Power supply	220-240V~ 50Hz
N.W(Kg)	3.86
Unit size(mm)	260x260x520
Giftbox size (mm)	310x310x575
1 x 20GP	500 pcs
1 x 40GP	1000 pcs
1 x 40HQ	1230 pcs

### Mod. SELECROC RC Convector heater

- 3 heat setting 700W/1400W/2200W
- Safety overheat protection
- Auto tip-over switch protection
- Adopt a new generation of high-efficiency heating agent, which will be hot upon startup
- With 7.5 hours timer
- With remote control
- LED display with room temperature
- With carry handle




Power supply	220-240V~ 50Hz
N.W(Kg)	3.86
Unit size(mm)	260x260x520
Giftbox size (mm)	310x310x575
1 x 20GP	500 pcs
1 x 40GP	1000 pcs
1 x 40HQ	1230 pcs

## >>>> CONVECTOR HEATER

### Mod. CH X01S Convector heater

- 3 heat setting 750W/750W/1500W
- Safety overheat protection
- With automatic thermostat control
- Power indicator light
- With carry handle
- Optional : Timer and Turbo



Power supply	220-240V~ 50Hz
N.W(Kg)	1.8
Unit size(mm)	510x170x320
Giftbox size (mm)	558x135x335
1 x 20GP	1150 pcs
1 x 40GP	2300 pcs
1 x 40HQ	2700 pcs

### Mod. CH X01 Convector heater

- 3 heat setting 750W/1250W/2000W
- Safety overheat protection
- With automatic thermostat control
- Power indicator light
- With carry handle
- Optional : Timer and Turbo



Power supply	220-240V~ 50Hz
N.W(Kg)	2.1
Unit size(mm)	535x196x385
Giftbox size (mm)	580x135x400
1 x 20GP	920 pcs
1 x 40GP	1920 pcs
1 x 40HQ	2260 pcs

## >>>> CONVECTOR HEATER

### Mod. CH X02

Convector heater

- 3 heat setting 750/1250/2000W
- Safety overheat protection
- With automatic thermostat control
- Power indicator light
- With carry handle
- Optional : Timer and Turbo



Power supply	220-240V~ 50-60Hz
N.W(Kg)	3.2
Unit size(mm)	690x196x490
Giftbox size (mm)	725x140x470
1 x 20GP	630 pcs
1 x 40GP	1300 pcs
1 x 40HQ	1400 pcs

### Mod. CH 03

Convector heater

- 3 heat setting 750/1250/2000W
- Safety overheat protection
- With automatic thermostat control
- Power indicator light
- With carry handle



Power supply	220-240V~ 50Hz
N.W(Kg)	3.2
Unit size(mm)	690x265x390
Giftbox size (mm)	640x152x443
1 x 20GP	680 pcs
1 x 40GP	1380 pcs
1 x 40HQ	1630 pcs

## >>>> CONVECTOR HEATER

### Mod. CH X04

Convector heater

- 3 heat setting 750/1250/2000W
- Safety overheat protection
- With automatic thermostat control
- Power indicator light
- With carry handle
- Optional : Timer and Turbo



Power supply	220-240V~ 50-60Hz
N.W(Kg)	3.2
Unit size(mm)	600x260x388
Giftbox size (mm)	640x145x440
1 x 20GP	710 pcs
1 x 40GP	1440 pcs
1 x 40HQ	1690 pcs

### Mod. CH X05-20 & CH X05-24

Convector heater

- 3 heat setting 750/1250/2000W (**CH X05-20**)
- 3 heat setting 1200/1200/2400W(**CH X05-24**)
- Safety overheat protection
- With automatic thermostat control
- Power indicator light
- With 24 hours timer setting
- With carry handle
- Optional : Timer and Turbo



Model No.	CH X05-20	CH X05-24
Power supply	220-240V~ 50-60Hz	220-240V~ 50-60Hz
N.W(Kg)	3.0	3.6
Unit size(mm)	650x172x425	775x172x450
Giftbox size (mm)	680x150x425	805x150x425
1 x 20GP	688 pcs	560 pcs
1 x 40GP	1390 pcs	1162 pcs
1 x 40HQ	1583 pcs	1305 pcs

## >>>> CONVECTOR HEATER

### Mod. CH X06T

#### Convector heater with timer

- 3 heat setting 750/1250/2000W
- Safety overheat protection
- With automatic thermostat control
- Power indicator light
- With carry handle
- With 24 hours timer
- Optional : Turbo



Power supply	220-240V~ 50-60Hz
N.W(Kg)	3.2
Unit size(mm)	605x210x375
Giftbox size (mm)	655x135x370
1 x 20GP	918 pcs
1 x 40GP	1836 pcs
1 x 40HQ	2142 pcs

2000 W

3 LEVEL  
thermostat

THERMOSTAT

Turbo



## >>>> CONVECTOR HEATER

### Mod. CH X07

#### Convector heater

- 3 heat setting 750/1250/2000W
- Safety overheat protection
- With automatic thermostat control
- With LCD display and remote control
- With 24 hours timer setting
- With carry handle
- Optional : Timer and Turbo



Power supply	220-240V~ 50-60Hz
N.W(Kg)	3.2
Unit size(mm)	715x130x460
Giftbox size (mm)	725x140x470
1 x 20GP	630 pcs
1 x 40GP	1300 pcs
1 x 40HQ	1400 pcs

2000 W

3 LEVEL  
thermostat

Turbo

THERMOSTAT



>>>> **GLASS PANEL CONVECTOR HEATER**  
**Mod. CHX-15GR-B LED & CHX-20GR-B(LED)**  
**Glass panel convector heater**

- 2 heat setting 750/1500W(**CHX-15GR-B (LED)**)
- 2 heat setting 1000W/2000W (**CHX-20GR-B (LED)**)
- Double thermal protector, thermal cut-out & thermal fuse
- Tempered glass front
- Freestanding or wall mount available
- With LED Display
- Remote Control
- X-shaped aluminum heating element
- With 24 hours timer or 24/7 digital timer
- ECO energy saving
- With Anti-frost stat set to 5 °C optional
- IP24



Power supply	220-240V~ 50-60Hz	220-240V~ 50-60Hz
N.W(Kg)	6.9	8.0
Unit size(mm)	705x260x520	830x260x520
Giftbox size (mm)	805x125x555	930x125x555
1 x 20GP	504 pcs	436 pcs
1 x 40GP	1045 pcs	903 pcs
1 x 40HQ	1225 pcs	1059 pcs

1500  
2000  
W

2  
LEVEL  
heating

⌚

🎮

IP24



>>>> **GLASS PANEL CONVECTOR HEATER**  
**Mod. CHL-10GLR & CHL-15GLR & CHL-20GLR**  
**Glass panel convector heater**

- 2 heat setting
- Tempered glass and metal housing
- X-shaped aluminum heating element
- Silent heating
- LED display with large digital, convenient operation
- With 24 hours timer
- Temperature control 5-50 degrees
- With window detection function
- Overheat protection
- Freestanding or wall mount available
- With remote control
- IP24
- Optional for feet and wheels



Model No.	CHL-10GLR	CHL-15GLR	CHL-20GLR
Power supply	220-240V~ 50/60Hz		
N.W(Kg)	5.5	6.4	7.7
Unit size(mm)	590x260x510	710x260x510	835x260x510
Giftbox size (mm)	685x125x555	805x130x470	930x125x555
1 x 20GP	589 pcs	501 pcs	433 pcs
1 x 40GP	1220 pcs	1038 pcs	899 pcs
1 x 40HQ	1430 pcs	1217 pcs	1045 pcs

1000w  
1500w  
2000w

2  
LEVEL  
heating

⌚

🎮

IP24



## >>>> GLASS PANEL HEATER

Mod. CHL-10GLWF & CHL-15GLWF & CHL-20GLWF

### Glass panel heater

- 2 heat setting
- Tempered glass and metal housing
- X-shaped aluminum heating element
- Silent heating
- LED display with big digital, convenient operation
- With 24 hours timer
- Temperature control 5-50 degrees
- With window detection function
- Overheat protection
- Freestanding or wall mount available
- With remote control
- IP24
- Optional for feet and wheels
- Optional : WIFI system



**1000w  
1500w  
2000w**

**2  
LEVEL  
heating**

**LEVEL  
heating**

**WIFI**



Model No.	CHP-10GL	CHP-15GL	CHP-20GL
Power supply	220-240V~ 50/60Hz		
N.W(Kg)	5.5	6.4	7.7
Unit size(mm)	590x260x510	710x260x510	835x260x510
Giftbox size (mm)	685x125x555	805x125x555	930x125x555
1 x 20GP	289 pcs	501 pcs	433 pcs
1 x 40GP	1220 pcs	1038 pcs	899 pcs
1 x 40HQ	1430 pcs	1217 pcs	1045 pcs

## >>>> GLASS PANEL HEATER

Mod. CHP-03L & CHP-04L

### Glass panel heater

- Comfortable and healthy radiant heat
- Double thermal cut-out
- For wall mounted install only
- LED display
- ECO program design
- Single power setting
- Internal aerial material heating wire
- Towel warmer bracket available
- Weekly timer and adaptive start control
- Adjustable thermostat control
- Over heating protection
- IP24 waterproof
- With remote control

**500  
850  
W**

**1  
LEVEL  
heating**

**LEVEL  
heating**

**THERMOSTAT**



Model No.	CHP-03L	CHP-04L
Power supply	220-240V~ 50/60Hz	220-240V~ 50/60Hz
N.W(Kg)	9.5	13.1
Unit size(mm)	570x28x720	1220x28x470
Giftbox size (mm)	880x85x645	1380x85x550
1 x 20GP	600 pcs	450 pcs
1 x 40GP	1200 pcs	900 pcs
1 x 40HQ	1400 pcs	1090 pcs



## >>>> RADIANT HEATER



**Mod. QH-201**  
Quartz heater

- 220-240V~ 50Hz
- Quartz heating elements
- 2 heat power setting 450W/900W
- Safety tip-over switch
- Oscillation function
- Safety overheat protection
- Optional: with remote control

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
310x160x705	1.8/2.2	800	1750	1985



**Mod. QH-202**  
Quartz heater

- 220-240V~ 50Hz
- 4 quartz tube heating elements
- 4 heat power setting 300/600/900/1200W
- Two sides heating
- Tip over safety switch
- Safety overheat protection

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
380x230x380	2.8/3.5	-	-	1770



## >>>> RADIANT HEATER

**Mod. QH-1307H**  
Quartz heater

- 220-240V~ 50-60Hz
- 4 quartz tube heating elements
- With safety tip-over switch
- 3 setting of power
- With long life -span
- Two side of heating
- With ERP controlled by PCB
- Temperature setting
- With LED display
- Automatically turn off when window opened


Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
445x175x456	3.8/4.5	843	1705	1979



**Mod. QH-1209C**  
Quartz heater

- 220-240V 50-60Hz
- 4 quartz tube heating elements
- With adjustable thermostat
- With safety tip-over switch
- 2 setting of power
- With ERP controlled by PCB
- With long life-span
- One side of heating
- Temperature setting
- With LED display
- Automatically turn off when window opened

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
680x135x730	5.2/6.4	390	815	1000



**Mod. QH-203**  
Quartz heater



- 220-240V~ 50Hz
- 4 quartz tube heating elements
- 3 heat power setting 400/800/1200W
- 90 degree oscillation function
- Safety tip-over switch
- Safety overheat protection

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
275x220x775	2.4/3.2	-	-	1438



**Mod. QH-204**  
Quartz fiber heater

- 220-240V~ 50Hz
- 2 quartz tube heating elements
- 2 heat power setting 400/800W
- Safety tip-over switch
- Safety overheat protection
- Indicator light

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
440x160x340	2.8/3.8	-	-	-



**Mod. QH-1835**  
Quartz heater

- 220-240V~ 50-60Hz
- 4 quartz tube heating elements
- With safety tip-over switch
- 3 setting of power
- With long life -span
- One side of heating
- With ERP controlled by PCB
- Temperature setting
- With LED display
- Automatically turn off when window opened

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
490x165x540	4.1/5.2	630	1300	1600



**Mod. QH-1840**  
Quartz fiber heater



- 220-240V 50-60Hz
- 4 quartz tube heating elements
- With safety tip-over switch
- 3 setting of power
- With thermostat control
- With long life-span
- With ERP controlled by PCB
- Temperature setting
- With LED display
- Automatically turn off when window opened

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
730x135x665	6.8/7.8	-	-	780



>>>> RADIANT HEATER



Mod. HH-201  
Halogen heater

- 220-240V~ 50Hz
- Halogen tube heating element
- 3 heat power setting 400/800/1200W
- Safety tip-over switch
- Oscillation function
- Safety overheat protection
- Optional: with remote control

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
310x160x705	1.8/2.2	800	1750	1985



Mod. HH-202  
Halogen heater

- 220-240V~ 50Hz
- Halogen tube heating element
- 3 heat power setting 400/800/1200W
- Safety tip-over switch
- Heat by halogen tube,
- Streamline design with handle
- Refinement repeating rolling function
- Long span line equably heating

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
405x295x530	1.5/1.8	1300	2600	3200



>>>> RADIANT HEATER

Mod. HR 03  
Carbon heater

- 220-240V~ 50Hz
- Carbon tube heating element
- 2 heat power setting 450W/900W
- Safety tip-over switch
- Oscillation function
- Refinement repeating rolling function
- Long span line equably heating


Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
505x305x735	2.1/2.8	801	1458	1665



Mod. HR 04  
Carbon heater

- 220-240V~ 50Hz
- Carbon tube heating element
- 2 heat power setting 450W/900W
- Safety tip-over switch
- Oscillation function
- Refinement repeating rolling function
- Long span line equably heating

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
275x275x670	2.4/2.9	550	1150	1300




Mod. HH 203  
Halogen heater



- 220-240V~ 50Hz
- Halogen tube heating element
- 3 heat power setting 400/800/1200W
- Safety thermal cut-out
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
245x175x335	1.89/2.3	1590	3240	3810



Mod. HH 204  
Halogen heater



- 220-240V~ 50Hz
- Halogen tube heating element
- 3 heat power setting 400/800/1200W
- Safety thermal cut-out
- Safety overheat protection
- Auto tip-over switch protection
- Oscillation function

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
245x175x335	1.89/2.3	1590	3240	3810



Mod. HR 05  
Carbon heater

- 220-240V~ 50Hz
- Carbon tube heating element
- 2 heat power setting 450W/900W
- Reflector upward adjustable
- Instant heat accompanied by not dazzling light
- Safety tip-over switch
- Oscillation function
- Integral carry handle
- High efficiency, energy-saving
- Have far-infrared physical therapy for body

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
312x160x745	2.7/3.0	790	1620	1850



Mod. HR 06  
Carbon heater

- 220-240V~ 50Hz
- Carbon tube heating element
- 2 heat power setting 450W/900W
- Safety tip-over switch
- Oscillation function

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
280x165x950	5.0/6.0	-	-	1200



## >>>> OIL RADIATOR HEATER



**Mod. RH 7M**  
Oil radiator

- 220-240V~ 50Hz
- Energy-efficient heat emission
- 3 heat setting 600/900/1500W
- Safety overheat protection
- Adjustable thermostat
- Power indicator light
- With cord storage
- Optional: 7/9/11 fins

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
335x240x615	8.7/9.3	700	1450	1720



**Mod. RH 9MT**  
Oil radiator

- 220-240V~ 50Hz
- Energy-efficient heat emission
- 3 heat setting 600/900/1500W
- Safety overheat protection
- 24 hours timer and room temperature
- Adjustable thermostat
- Power indicator light
- With cord storage
- Optional: 7/9/11 fins

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
395x240x615	9.7/10.5	590	1240	1460



## >>>> OIL RADIATOR HEATER

**ECO FRIENDLY**



**Mod. RO 8Z FREE MINI**  
Mini oil free radiator

- 220-240V~ 50Hz
- Energy-efficient heat emission
- 1 heat setting 600W (6fins), 800W (8fins)
- 30% more efficient than the traditional radiator
- Heats 8 times faster than traditional oil radiator
- Safety overheat protection
- Adjustable thermostat
- With cord storage
- Optional: 6/8 fins

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
310x180x440	4.2/4.8	820	1680	1940



**ECO FRIENDLY**



**Mod. RO 8Z FREE LED**  
Oil free radiator with remote control

- 220-240V~ 50Hz
- Energy-efficient heat emission
- 3 heat setting 600/900/1500W
- Safety overheat protection
- 24 hours timer and room temperature
- LED display
- 30% more efficient than the traditional radiator
- Heats 8 times faster than traditional oil radiator
- Adjustable thermostat
- With cord storage
- Optional: 6/8 fins

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
450x240x640	7.2/8.1	588	1200	1380



**Mod. TR 9ZTT**  
Oil radiator



- 220-240V~ 50Hz
- Energy-efficient heat emission
- 3 heat setting 800/1200/2000W + 400W (turbo fan)
- Safety overheat protection
- With Turbo Fan
- 24 hours timer
- Power indicator light
- With cord storage
- Optional: 7/9/11 fins

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
420x240x650	11.5/12.5	628	1264	1430



**Mod. RO 11A LED**  
Oil radiator



- 220-240V~ 50Hz
- Energy-efficient heat emission
- 3 heat setting 800/1200/2000W
- Safety overheat protection
- 24 hours timer and room temperature
- LED display
- Adjustable thermostat
- With cord storage
- Optional: 7/9/11 fins

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
380x230x380	2.8/3.5	-	-	1770



**Mod. RO 7Z**  
Oil radiator



- 220-240V~ 50Hz
- Energy-efficient heat emission
- 3 heat setting 600/900/1500W
- Safety overheat protection
- Adjustable thermostat
- Power indicator light
- With cord storage
- Optional: 5/7/9/11/13 fins

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
340x240x660	7.8/8.5	916	1832	2150



**Mod. RO 7Z LCD**  
Oil radiator



- 220-240V~ 50Hz
- Energy-efficient heat emission
- 3 heat setting 600/900/1500W
- Safety overheat protection
- 24 hours timer and room temperature
- LCD display
- Adjustable thermostat
- Power indicator light
- With cord storage
- Optional: 5/7/9/11/13/15 fins

Unit size(mm)	N.W/ GW(Kg)	20GP(pcs)	40GP(pcs)	40HQ(pcs)
340x240x660	7.8/8.5	916	1832	2150





Room 1608, 16/F, APEC Plaza,  
49 Hoi Yuen Road, Kwun Tong,  
Hong Kong  
Tel: +852 3611 4220  
Mobile: +852 9655 5960  
China Mobile +86 147 1433 8401  
Email: [april.lee@sico-hk.com](mailto:april.lee@sico-hk.com)